



Type of fluid
AIR-WATER

Pressure
10-20 bar

Material
- AISI 304 S. STEEL
- ABS

WITH SPRING




FIXED*



SWIVELLING



- with hose, see page 139
- without hose, max. 100 °C

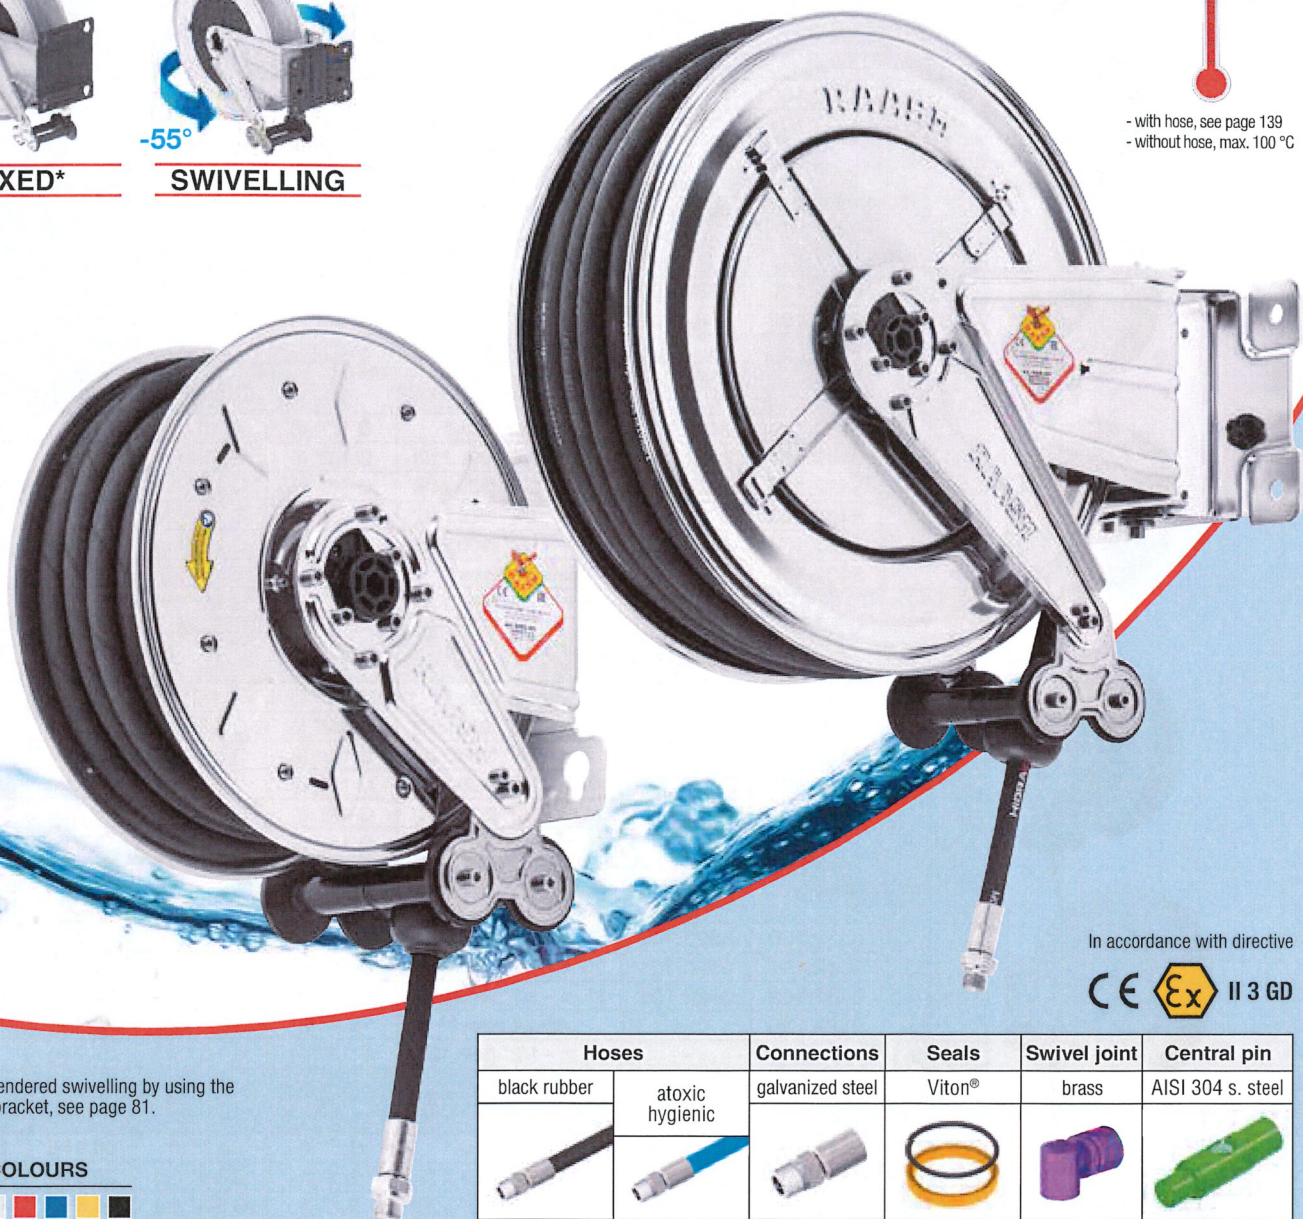

In accordance with directive



* can be rendered swivelling by using the special bracket, see page 81.

DRUM COLOURS




Hoses		Connections	Seals	Swivel joint	Central pin
black rubber	atoxic hygienic	galvanized steel	Viton®	brass	AISI 304 s. steel

Overall dimensions FIXED (mm)										Packaging (mm) W x D x H
Series	A	B	C	D	E	F	G	H	I	
290	186	140	196	226	98	330	300	339	135	
330	186	140	196	226	98	390	350	365	155	
390	186	140	196	226	98	410	390	410	155	
430	186	140	197	226	97	450	415	456	264	
430 ABS	186	140	197	226	110	450	425	461	259	
530	203	153	221	258	104	535	510	558	315	
540	300	218	227	268	165	535	510	572	315	
560	488	399	238	272	348	535	510	578	315	

Overall dimensions SWIVELLING (mm)										Packaging (mm) W x D x H
Series	A	B	C	D	E	F	G	H	I	
390	184	146	106	144	98	410	390	482	155	
430	208	162	118	164	97	450	415	540	264	
530	228	182	154	200	104	535	510	642	315	
540	300	218	227	268	165	535	510	700	315	

(W: width - D: depth - H: height)

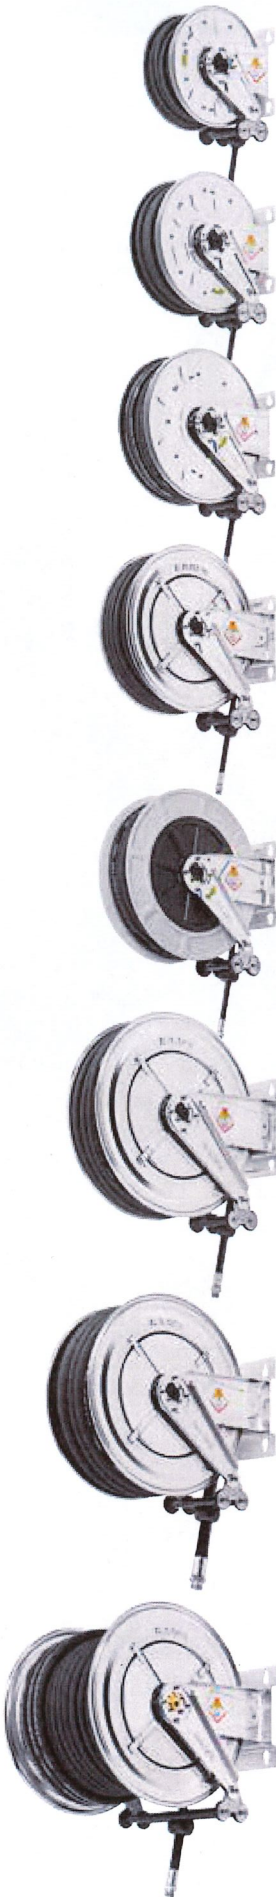

	P/N		Hose supplied	Connection		Weight	
	fixed	swivelling		inlet	outlet	fixed	swivelling
s. 290 20 bar	8292.100	-	without hose *	G 3/8" (f)	G 3/8" (f)	10,0 kg	-
	8292.101	-	10 m - 3/8" (995.210)	G 3/8" (f)	G 3/8" (m)	12,0 kg	-
	8292.104	-	15 m - 1/4" (993.215)	G 3/8" (f)	G 1/4" (m)	12,0 kg	-
* Hose reel capacity		inner hose Ø	1/4" 5/16" 3/8"				
		max. length	16 m 14 m 10 m				
s. 330 20 bar	8332.100	-	without hose *	G 3/8" (f)	G 3/8" (f)	11,2 kg	-
	8332.101	-	12 m - 3/8" (995.211)	G 3/8" (f)	G 3/8" (m)	13,5 kg	-
	8333.101	-	12 m - 3/8" (995.112)	G 3/8" (f)	G 3/8" (m)	13,4 kg	-
* Hose reel capacity		inner hose Ø	1/4" 5/16" 3/8" 1/2"				
		max. length	18 m 16 m 14 m 12 m				
s. 390 20 bar	8392.100	8382.100	without hose *	G 3/8" (f)	G 3/8" (f)	13,0 kg	13,5 kg
	8392.102	8382.102	18 m - 3/8" (995.217)	G 3/8" (f)	G 3/8" (m)	16,0 kg	16,5 kg
* Hose reel capacity		inner hose Ø	1/4" 5/16" 3/8" 1/2"				
		max. length	20 m 20 m 18 m 15 m				
s. 430 20 bar	8432.100	8422.100	without hose *	G 1/2" (f)	G 1/2" (f)	16,0 kg	16,5 kg
	8432.101	8422.101	12 m - 3/8" (995.212)	G 1/2" (f)	G 3/8" (m)	18,7 kg	19,2 kg
	8432.102	8422.102	18 m - 3/8" (995.218)	G 1/2" (f)	G 3/8" (m)	19,5 kg	20,0 kg
	8432.103	8422.103	10 m - 1/2" (996.210)	G 1/2" (f)	G 1/2" (m)	19,2 kg	19,7 kg
	8432.104	8422.104	15 m - 1/2" (996.215)	G 1/2" (f)	G 1/2" (m)	20,2 kg	20,7 kg
	8432.150	-	without hose **	G 1" (f)	G 3/4" (f)	17,0 kg	-
10 bar	8433.102	-	15 m - 1/2" (996.116)	G 1/2" (f)	G 1/2" (m)	19,2 kg	-
Hose reel capacity		inner hose Ø	* 5/16" 3/8" 1/2"				
		max. length	20 m 20 m 16 m	** 5/8" 3/4"			
				14 m 8 m			
s. 430 ABS 20 bar	9432.100	-	without hose *	G 1/2" (f)	G 1/2" (f)	12,5 kg	-
	9432.101	-	12 m - 3/8" (995.212)	G 1/2" (f)	G 3/8" (m)	15,2 kg	-
	9432.102	-	18 m - 3/8" (995.218)	G 1/2" (f)	G 3/8" (m)	16,0 kg	-
	9432.103	-	10 m - 1/2" (996.210)	G 1/2" (f)	G 1/2" (m)	15,7 kg	-
	9432.104	-	15 m - 1/2" (996.215)	G 1/2" (f)	G 1/2" (m)	16,7 kg	-
10 bar	9433.102	-	15 m - 1/2" (996.116)	G 1/2" (f)	G 1/2" (m)	15,5 kg	-
* Hose reel capacity		inner hose Ø	5/16" 3/8" 1/2"				
		max. length	20 m 20 m 16 m				
s. 530 20 bar	8532.100	8522.100	without hose *	G 1/2" (f)	G 1/2" (f)	21,0 kg	22,0 kg
	8532.101	8522.101	20 m - 1/2" (996.220)	G 1/2" (f)	G 1/2" (m)	26,5 kg	27,5 kg
	8532.102	8522.102	25 m - 1/2" (996.225)	G 1/2" (f)	G 1/2" (m)	27,3 kg	28,3 kg
	8532.150	-	without hose **	G 1" (f)	G 1" (f)	22,0 kg	-
10 bar	8533.102	-	25 m - 1/2" (996.125)	G 1/2" (f)	G 1/2" (m)	27,1 kg	-
Hose reel capacity		inner hose Ø	* 3/8" 1/2" 5/8"				
		max. length	25 m 25 m 22 m	** 3/4" 1"			
				12 m 8 m			
s. 540 20 bar	8542.100	8552.100	without hose *	G 1" (f)	G 1" (f)	28,0 kg	33,5 kg
	8542.101	8552.101	15 m - 3/4" (997.215)	G 1" (f)	G 3/4" (m)	35,0 kg	40,5 kg
	8542.102	8552.102	20 m - 3/4" (997.220)	G 1" (f)	G 3/4" (m)	36,5 kg	42,0 kg
	8542.103	8552.103	15 m - 1" (998.215)	G 1" (f)	G 1" (m)	38,6 kg	44,1 kg
	8542.105	8552.105	without hose **	G 1/2" (f)	G 1/2" (f)	28,5 kg	34,0 kg
	8542.106	8552.106	30 m - 1/2" (996.230)	G 1/2" (f)	G 1/2" (m)	36,4 kg	41,9 kg
s. 540 10 bar	8543.102	-	20 m - 3/4" (997.120)	G 1" (f)	G 3/4" (m)	36,5 kg	-
	8543.103	-	15 m - 1" (998.115)	G 1" (f)	G 1" (m)	38,0 kg	-
	8543.106	-	30 m - 1/2" (996.130)	G 1/2" (f)	G 1/2" (m)	36,5 kg	-
Hose reel capacity		inner hose Ø	* 5/8" 3/4" 1"				
		max. length	20 m 22 m 15 m	** 3/8" 1/2" 5/8"			
				30 m 30 m 30 m			
s. 560 20 bar	8562.100	-	without hose *	G 1" (f)	G 1" (f)	48,0 kg	-
	8562.101	-	30 m - 3/4" (997.230)	G 1" (f)	G 3/4" (m)	60,0 kg	-
	8562.103	-	40 m - 3/4" (997.240)	G 1" (f)	G 3/4" (m)	63,0 kg	-
	8562.104	-	20 m - 1" (998.220)	G 1" (f)	G 1" (m)	60,6 kg	-
	8562.105	-	30 m - 1" (998.230)	G 1" (f)	G 1" (m)	64,0 kg	-
	8562.106	-	without hose **	G 1/2" (f)	G 1/2" (f)	47,5 kg	-
	10 bar	8563.103	-	40 m - 3/4" (997.140)	G 1" (f)	G 3/4" (m)	63,5 kg
	8563.105	-	30 m - 1" (998.130)	G 1" (f)	G 1" (m)	64,5 kg	-
Hose reel capacity		inner hose Ø	* 5/8" 3/4" 1"				
		max. length	50 m 40 m 30 m	** 3/8" 1/2" 5/8"			
				60 m 60 m 60 m			

 Atoxic hygienic hose

 Black rubber hose