




Suction drainer-dispensers for fuels



Wheel-mounted air-operated suction systems, for the management of fuels.

The air pump, equipped with special Viton® seals, is suitable for sucking petrol or diesel oil from any vehicle or motorcycle by means of the probes or connections supplied. The wheel-mounted drainer with pump is easy to handle, versatile. The system is equipped with an earth connection for discharging electrostatic current.


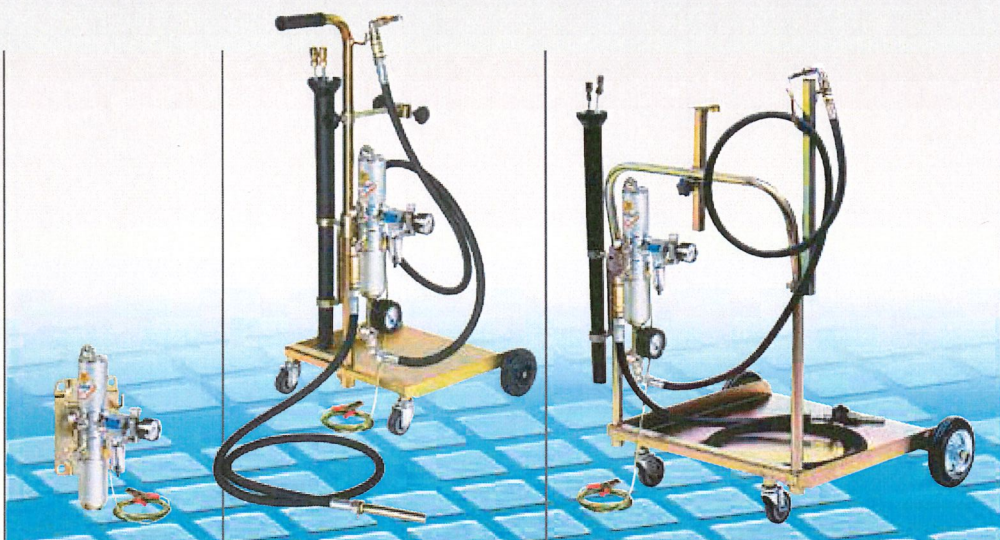


	wall-mounted	wheel mounted for drums 30 - 60 kg	wheel mounted for drums 180 - 220 kg
Article	45200	45250	45280
Pump suction	Art. -	33070/A	33070/A
Max pressure air to pump	bar 4	4	4
Noise level	dB 81	81	81
Suitable for drums	kg -	30 - 60	180 - 220
Length of suction hose	m -	2	2
Length of draining hose	m -	2	2
Suction speed	l/min 5 - 10	5 - 10	5 - 10
Trolley	Art. -	80050	80200
Wall bracket	Art. 33115	-	-
Set of probes	Art. -	probe ø 8 - probe ø 12	probe ø 8 - probe ø 12
Connections for tubes ø 6 - 8 - 10	Art. -	45290 - 45291 - 45292	45290 - 45291 - 45292
Earth connection 3 m	yes	yes	yes
Packing	N° - m ³ 1 - 0,015	2 - 0,080	2 - 0,113
Weight	kg 6,2	19,5	32,1
Dimensions (A - B - C)	cm 13,6 - 6,5 - 36	50 - 50 - 100	76 - 67 - 87

Details and advantages

For correct draining, the pump must operate slowly.

To adjust the working speed, operate the flow regulator, "metering" the inlet air feed. Make sure the vacuum gauge indicator is always in the optimum position

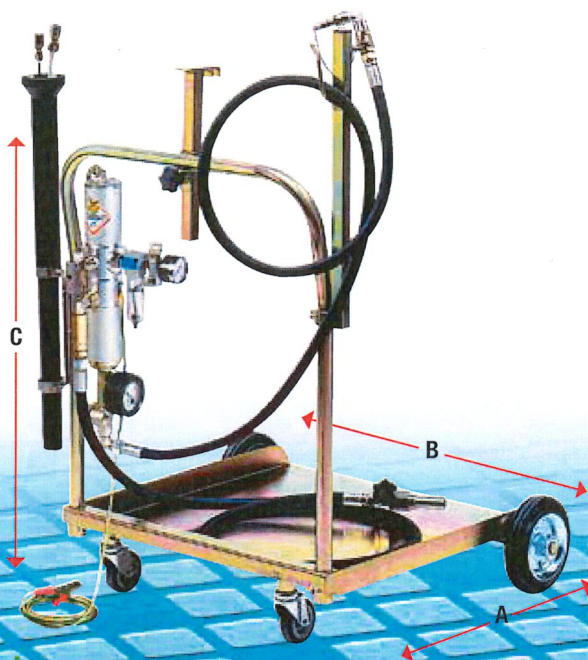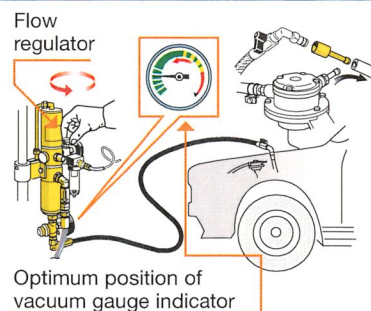

Art. 45290
Connection for tube ø 6



Art. 45291
Connection for tube ø 8



Art. 45292
Connection for tube ø 10

